

BRL  
1351  
c.1A

REFERENCE COPY

BRL R 1351

# BRL

AD

REPORT NO. 1351

A NON-LINEAR SHOCK WAVE REFLECTION THEORY

by

Ralph E. Shear  
Ray C. Makino

January 1967

Distribution of this document is unlimited.

U. S. ARMY MATERIEL COMMAND  
**BALLISTIC RESEARCH LABORATORIES**  
ABERDEEN PROVING GROUND, MARYLAND

21-59125-91

Destroy this report when it is no longer needed.  
Do not return it to the originator.

The findings in this report are not to be construed as  
an official Department of the Army position, unless  
so designated by other authorized documents.

B A L L I S T I C   R E S E A R C H   L A B O R A T O R I E S

REPORT NO. 1351

JANUARY 1967

Distribution of this document is unlimited.

A NON-LINEAR SHOCK WAVE REFLECTION THEORY

Ralph E. Shear  
Ray C. Makino

APPROVED FOR  
PUBLICATION  
BY THE DIRECTOR, DOD. 10. 10. 67

Computing Laboratory

RDT&E Project No. 1P014501A14B

A B E R D E E N   P R O V I N G   G R O U N D , M A R Y L A N D

B A L L I S T I C   R E S E A R C H   L A B O R A T O R I E S

REPORT NO. 1351

REShear/RCMakino/sjw  
Aberdeen Proving Ground, Md.  
January 1967

A NON-LINEAR SHOCK WAVE REFLECTION THEORY

ABSTRACT

A one-dimensional theory of normal reflection of blast waves from walls is given. The method satisfies the initial and boundary conditions of the problem. It is shown how the entire reflected wave zone, including the reflected shock front and the pressure and impulse on the wall, can be calculated.

## TABLE OF CONTENTS

	Page
ABSTRACT . . . . .	3
LIST OF SYMBOLS . . . . .	7
INTRODUCTION . . . . .	11
FLOW EQUATIONS . . . . .	12
SHOCK CONDITIONS . . . . .	14
CONSTRAINTS . . . . .	17
DETERMINATION OF REFLECTION DOMAIN . . . . .	19
REFERENCES . . . . .	26
DISTRIBUTION LIST . . . . .	27

# LIST OF SYMBOLS

\* = denotes dimensional quantities

a = a constraint parameter on u

b = a constraint parameter on u

$c_{oo}^*$  = sound velocity in undisturbed air

$c_o^*$  = sound velocity in region traversed by incident shock

$$c_o = \frac{c_o^*}{c_{oo}^*}$$

$c^*$  = sound velocity in region traversed by reflected shock

$$c = \frac{c^*}{c_{oo}^*}$$

$E_{oo}^*$  = specific internal energy of undisturbed air

$E_o^*$  = specific internal energy in region traversed by incident shock

$$E_o = \frac{E_o^* - E_{oo}^*}{c_{oo}^{*2}}$$

$E^*$  = specific internal energy in region traversed by reflected shock

$$E = \frac{E^* - E_{oo}^*}{c_{oo}^{*2}}$$

$M^*$  = mass of explosive

$p_{oo}^*$  = total pressure of undisturbed air

$p_o^*$  = total pressure in region traversed by incident shock

$$p_o = \frac{p_o^*}{p_{oo}^*}$$

$p^*$  = total pressure in region traversed by reflected shock

# LIST OF SYMBOLS (Contd)

$$p = \frac{p^*}{p_{oo}^*}$$

$R^*$  = gas constant

$S_{oo}^*$  = specific entropy of undisturbed air

$S_o^*$  = specific entropy in region traversed by incident shock

$$S_o = \frac{S_o^* - S_{oo}^*}{R^*}$$

$S^*$  = specific entropy in region traversed by reflected shock

$$S = \frac{S^* - S_{oo}^*}{R^*}$$

$t^*$  = time

$$t = \left( \frac{c_{oo}^* p_{oo}^*}{M^*} \right)^{1/3} t^*$$

$u_o^*$  = particle velocity in region traversed by incident shock

$u^*$  = particle velocity in region traversed by reflected shock

$$u = \frac{u^*}{c_{oo}^*}$$

$U^*$  = velocity of reflected shock

$$U = \frac{U^*}{c_{oo}^*}$$

$x^*$  = linear distance

$$x = \left( \frac{p_{oo}^*}{c_{oo}^{*2} M^*} \right)^{1/3} x^*$$

$\gamma$  = specific heat ratio of air

$$\mu = \left( \frac{\gamma - 1}{\gamma + 1} \right)^{1/2}$$

# LIST OF SYMBOLS (Contd)

$\rho_{oo}^*$  = density of undisturbed air

$\rho_o^*$  = density in region traversed by incident shock

$$\rho_o = \frac{\gamma \rho_o^*}{\rho_{oo}^*}$$

$\rho^*$  = density in region traversed by reflected shock

$$\rho = \frac{\gamma \rho^*}{\rho_{oo}^*}$$



## INTRODUCTION

The study of damage to structures by blast waves requires analysis of the normally reflected pressure on the wall. To solve this problem the hydrodynamical equations of flow must be solved in the region between the wall and the reflected shock front. Since the system of non-linear partial differential equations of flow are presently solvable only by numerical methods that, when reliable, are somewhat cumbersome, and the possibility of exact analytical solution is remote, a method that simplifies the mathematics somewhat and is more amenable to analytic solution is desirable. Here, we examine a direction of simplification that reduces the system of equations for one-dimensional flow to a system of ordinary differential equations, by introduction of a constraint that satisfies the initial and wall conditions, as discussed by Makino.<sup>1\*</sup>

Makino and Shear<sup>2</sup> have obtained a theory of reflected impulse at the wall by regarding each element of the incident wave to be individually reflected like the shock front, but this is a zero'th order approximation, not satisfying derivative conditions at the wall. Chang and Laporte<sup>3</sup> have obtained two theories of shock reflection. One is series expansion about the point of reflection, which, if truncated for practical purposes, may not fully satisfy the wall conditions. The other theory, which assumes the particle velocity to be zero all along the reflected shock line, may also not fully satisfy the wall conditions. Also, both theories are for the calculation of the reflected shock line only. In the theory we present here, we consider calculation of the entire reflected wave zone, from the shock front through interior points to points on the wall, such that wall conditions are satisfied through certain derivatives. However, it is probably most useful only in that phase of the wave exerting the greatest stress on the wall, which is the part of greatest interest for damage studies.

---

\* *Superscript numbers denote references which may be found on page 26.*

Ryzhov and Khristianovich<sup>4</sup> have developed a theory on the problem of two dimensional regular reflection, but the theory assumes isentropic flow and is therefore applicable to weak shocks only, and further, the boundary conditions are approximated. Shindiapin<sup>5</sup> has improved the theory with respect to boundary conditions, but has not extended the theory to non-isentropic flow.

While the so-called self-similar type solutions<sup>6,7</sup> can be extended to the reflection problem as an approximation, the choice of the similarity form to be assumed is made difficult by the strong influence of the wall and by the non-constancy of the quantities in front of the reflected shock.

The example considered here is for plane flow, or spherical flow at distances sufficiently far from the center of energy release that planar approximation suffices. It is shown how the flow parameters behind the reflected wave, in particular the pressure on the wall as a function of time and the impulse, can be obtained. For cylindrical and spherical flows, the same method is applicable if the reflecting surfaces have the corresponding symmetries.

#### FLOW EQUATIONS

The non-dimensionalized equations of flow describing the one-dimensional motion of air are, in Eulerian coordinates,<sup>8</sup> conservation of mass

$$(1a) \quad p_t + up_x + \rho c^2 u_x = 0 ,$$

conservation of momentum

$$(1b) \quad \frac{1}{\rho} p_x + u_t + uu_x = 0 ,$$

adiabaticity

$$(1c) \quad S_t + uS_x = 0 ,$$

where  $t$  is the time with the non-dimensionalizing scaling factor (ambient sound speed times ambient pressure/mass of explosive) $^{1/3}$ ,  $x$  is the distance with the non-dimensionalizing scaling factor (ambient pressure/(ambient sound speed) $^2$ /mass of explosive) $^{1/3}$ ,  $p$  is the pressure in units of the ambient pressure,  $u$  is the particle velocity in units of the ambient sound speed,  $c$  is the sound velocity in units of the ambient sound speed,  $\rho$  is the specific heat ratio  $\gamma$  (assumed constant) times the density in units of the ambient density, and  $S$  is the excess entropy over the ambient in units of the gas constant  $R$ .

This system of equations is supplemented by the equation of state, which, for illustrative purpose, we assume to be ideal:

$$(2a) \quad \rho = \gamma p^{1/\gamma} \exp \left( -\frac{\gamma-1}{\gamma} S \right),$$

$$(2b) \quad E = \frac{1}{\gamma-1} \frac{p}{\rho} - \frac{1}{\gamma(\gamma-1)} ,$$

where  $E$  is the non-dimensionalized energy.

The Eulerian coordinates  $x, t$  in the equations above are replaced by Lagrange coordinates. We define  $m$  to be the mass integral

$$(3) \quad m = \int \rho(x,t) dx ,$$

where the integration is performed on a constant  $t$  line starting from the wall. From this definition and from the continuity Equation (1a) in the form

$$(4) \quad \rho_t = -(\rho u)_x ,$$

we obtain

$$(5a) \quad m_x = \rho ,$$

$$(5b) \quad m_t = -\rho u ,$$

and also

$$(6) \quad x_t(m,t) = u.$$

Using Equations (5) and (2), we put Equation (1) in the form

$$(7) \quad \begin{vmatrix} 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & \gamma p & 0 & 0 \\ 0 & 0 & 1 & 0 & 1 & 0 \end{vmatrix} V = \begin{vmatrix} 0 \\ 0 \\ 0 \end{vmatrix},$$

where  $V \equiv \text{col} \begin{vmatrix} S_t, p_t, u_t, u_m, p_m, S_m \end{vmatrix}$ .

Differentiation of Equation (7) with respect to  $m$  and  $t$  gives

$$(8) \quad \begin{vmatrix} 1 & 0 & 0 & 0 & 0 & \gamma p & 0 & 0 & 0 \\ 0 & 1 & \gamma p & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \end{vmatrix} W = \begin{vmatrix} \frac{\gamma+1}{\gamma} p_t \left( \frac{p_m}{p} - u^2 S_m \right) \\ \frac{\gamma+1}{\gamma} \frac{p_t^2}{p} \\ 0 \\ 0 \\ 0 \\ 0 \end{vmatrix}$$

where

$$(9) \quad W \equiv \text{col} \begin{vmatrix} p_{mt}, p_{tt}, u_{mt}, u_{tt}, p_{mm}, u_{mm}, S_{mm}, S_{mt}, S_{tt} \end{vmatrix}.$$

#### SHOCK CONDITIONS

The Rankine-Hugoniot conditions that must be satisfied across the shock front are,<sup>7</sup> in dimensionless form, conservation of mass,

$$(10a) \quad \rho(U - u) = \rho_o(U - u_o),$$

conservation of momentum,

$$(10b) \quad \rho(U - u)^2 + p = \rho_o(U - u_o)^2 + p_o ,$$

conservation of energy,

$$(10c) \quad \frac{1}{2}(U - u)^2 + E + \frac{p}{\rho} = \frac{1}{2}(U - u_o)^2 + E_o + \frac{p_o}{\rho_o} ,$$

where  $U$  is the shock velocity  $\frac{dx}{dt}$  .

These conditions simplified by Equation (2) give

$$(11a) \quad u = u(p; u_o, p_o, S_o) = u_o$$

$$+ (p - p_o) \left[ \frac{2}{\gamma(\gamma + 1)} \frac{\exp \left( \frac{\gamma - 1}{\gamma} S_o \right)}{p_o^{1/\gamma} (p + \mu^2 p_o)} \right]^{1/2} ,$$

$$(11b) \quad S = S(p; u_o, p_o, S_o) = S_o$$

$$+ \frac{\gamma}{\gamma - 1} \ln \left( \frac{p}{p_o} \right)^{1/\gamma} \left( \frac{\mu^2 p + p_o}{p + \mu^2 p_o} \right) ,$$

$$(11c) \quad U = U(p; u_o, p_o, S_o) = u_o$$

$$+ \left[ \frac{(p + \mu^2 p_o) \exp \left( \frac{\gamma - 1}{\gamma} S_o \right)}{(1 - \mu^2) p_o^{1/\gamma}} \right]^{1/2} .$$

Let  $D = \frac{\partial}{\partial t} + \rho(U - u) \frac{\partial}{\partial m}$  be the differential operator in the direction of the shock line. Implicit differentiation of  $u$  and  $S$  along the reflected shock line gives

$$-\frac{\partial u}{\partial p} p_t + u_t + \rho(U - u)u_m - \rho(U - u)\frac{\partial u}{\partial p} p_m = F_1 ,$$

(12a)

$$F_1 \equiv \frac{\partial u}{\partial p_o} Dp_o + \frac{\partial u}{\partial u_o} Du_o + \frac{\partial u}{\partial S_o} DS_o ,$$

$$-\frac{\partial S}{\partial p} p_t - \rho(U - u) \frac{\partial S}{\partial p} p_m + \rho(U - u)S_m = F_2 ,$$

(12b)

$$F_2 \equiv \frac{\partial S}{\partial p_o} Dp_o + \frac{\partial S}{\partial u_o} Du_o + \frac{\partial S}{\partial S_o} DS_o ,$$

where the shock path is given by

$$(13) \quad Dm = \rho(U - u) .$$

The quantities, identified by subscript  $o$ , that result from the incident wave we assume to be known as functions of  $m$  and  $t$ . From Equation (11), the first partial derivatives with respect to the arguments  $p$ ,  $u_o$ ,  $p_o$ ,  $S_o$ , become

$$(14a) \quad \frac{\partial u}{\partial p} = \frac{(u - u_o)}{(p - p_o)} \frac{[p + (1 + 2u^2)p_o]}{2(p + u^2 p_o)} ,$$

$$(14b) \quad \frac{\partial u}{\partial u_o} = 1 ,$$

$$(14c) \quad \frac{\partial u}{\partial S_o} = \frac{\gamma - 1}{2\gamma} (u - u_o) ,$$

$$(14d) \quad \frac{\partial u}{\partial p_o} = \frac{-(u - u_o) \left[ p^2 + (3\gamma - 2)pp_o + (\gamma - 1)\mu^2 p_o^2 \right]}{2\gamma p_o(p - p_o)(p + \mu^2 p_o)},$$

$$(14e) \quad \frac{\partial S}{\partial p} = \frac{1}{\gamma + 1} \frac{(p - p_o)^2}{p(p + \mu^2 p_o)(\mu^2 p + p_o)},$$

$$(14f) \quad \frac{\partial S}{\partial u_o} = 0,$$

$$(14g) \quad \frac{\partial S}{\partial S_o} = 1,$$

$$(14h) \quad \frac{\partial S}{\partial p_o} = \frac{-1}{\gamma + 1} \frac{(p - p_o)^2}{p_o(p + \mu^2 p_o)(\mu^2 p + p_o)}.$$


#### CONSTRAINTS

For simplicity, it is assumed that the reflecting wall is at  $m = x = 0$  (see Figure). At the wall the particle velocity must satisfy the conditions

$$(15) \quad \left( \frac{\partial^n u(x,t)}{\partial t^n} \right)_{x=0} = 0, \quad n = 0, 1, 2, \dots$$

From this result and the ideal gas law (2a), we can show by taking higher derivatives of (1a) and (1b) that  $u$  must satisfy also the condition

$$(16) \quad \left( \frac{\partial^2 u(x,t)}{\partial x^2} \right)_{x=0} = 0.$$

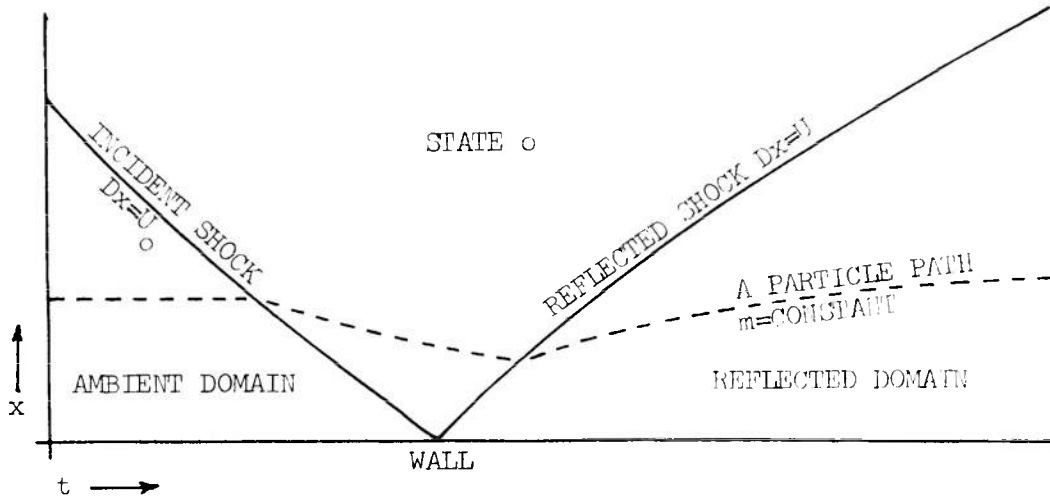

We now impose some constraints on the flow. There is an infinity of ways of doing this. The choice will depend on the nature of the ambient conditions and the incident wave. For blast waves in still air, in the neighborhood of the wall at all times and also in the neighborhood of the asymptotic shock, we expect the particle velocity to vary slowly with  $x$ , and so we choose

$$(17) \quad u = a(t)x + b(t)x^3,$$

where  $a(t)$  and  $b(t)$  are functions of  $t$  only. This expression satisfies both boundary conditions (15) and (16), and also permits the initial and shock conditions to be satisfied.

For subsequent purpose, we differentiate Equation (17) twice with respect to  $m$ :

$$(18a) \quad u_m = \frac{u + 2bx^3}{\rho x},$$

$$(18b) \quad u_{mm} = \frac{6bx}{\rho} - \frac{u_m}{\gamma p} [p_m - (\gamma - 1) p S_m].$$



# DETERMINATION OF REFLECTION DOMAIN

Equations (18a), (12), and (7) are six equations involving the six components of  $V$ . Solving for  $V$ , we obtain

$$(19) \quad V = \begin{pmatrix} 0 \\ -H\{\rho(U-u)\frac{\partial u}{\partial p} + 1\} \\ -G - H\frac{\partial u}{\partial p} \\ \frac{H}{\gamma p \rho}\{\rho(U-u)\frac{\partial u}{\partial p} + 1\} \\ G + H\frac{\partial u}{\partial p} \\ \frac{1}{\rho(U-u)} \left[ F_2 + \frac{\partial S}{\partial p} \{G\rho(U-u) - H\} \right] \end{pmatrix}$$

where

$$G = \frac{(u + 2bx^3)(U-u) - xF_1}{x\{\rho(U-u)\frac{\partial u}{\partial p} + 1\}},$$

$$H = \frac{\gamma p(u + 2bx^3)}{x\{\rho(U-u)\frac{\partial u}{\partial p} + 1\}}.$$

By differentiating Equation (12) along the reflected shock line, we have

$$(20a) \quad -2\frac{\partial u}{\partial p} \rho(U-u) p_{mt} - \frac{\partial u}{\partial p} p_{tt} + 2\rho(U-u) u_{mt} \\ + u_{tt} - \rho^2(U-u)^2 \frac{\partial u}{\partial p} p_{mm} + \rho^2(U-u)^2 u_{mm} = F_3,$$

$$(20b) \quad -2 \frac{\partial S}{\partial p} \rho (U - u) p_{mt} - \frac{\partial S}{\partial p} p_{tt} - \frac{\partial S}{\partial p} \rho^2 (U - u)^2 p_{mm} \\ + \rho^2 (U - u)^2 S_{mm} = F_4 ,$$

where

$$(21a) \quad F_3 \equiv DF_1 + Dp D \left[ \frac{\partial u}{\partial p} \right] - \left[ u_m - p_m \frac{\partial u}{\partial p} \right] D [\rho (U - u)] ,$$

$$(21b) \quad F_4 \equiv DF_2 + \left[ \frac{\partial S}{\partial p} p_m - S_m \right] D [\rho (U - u)] + Dp \left[ \frac{\partial S}{\partial p} \right] .$$

Equations (20), (18b), and (8) are nine equations involving the nine components of  $W$ . Solving for  $W$  gives

$$(22) \quad W = B^{-1} Y ,$$

where

$$(23a) \quad Y = \begin{pmatrix} \frac{\gamma + 1}{\gamma} p_t \left( \frac{p_m}{p} - u^2 S_m \right) \\ \frac{\gamma + 1}{\gamma} \frac{p_t^2}{p} \\ 0 \\ 0 \\ F_3 \\ \frac{6bx}{\rho^2} - \frac{\gamma + 1}{\gamma} u_m \left( \frac{1}{\gamma + 1} \frac{p_m}{p} - u^2 S_m \right) \\ F_4 \\ 0 \\ 0 \end{pmatrix} ,$$

$$(23b) \quad B^{-1} = \begin{vmatrix} B_{11} & B_{12} \\ B_{21} & B_{22} \end{vmatrix},$$

$$(23c) \quad \xi = [\rho(U - u)^2 + \gamma p] \frac{\partial u}{\partial p} + 2(U - u),$$

$$(23d) \quad B_{11} = \begin{vmatrix} 1 & 0 & 0 & 0 \\ \frac{-\gamma p \left[ 2\rho(U - u) \frac{\partial u}{\partial p} + 1 \right]}{\xi} & \frac{\rho(U - u)^2 \frac{\partial u}{\partial p} + 2(U - u)}{\xi} & \frac{-\gamma p \rho^2 (U - u)^2 \frac{\partial u}{\partial p}}{\xi} & \frac{\gamma p}{\xi} \\ \frac{2\rho(U - u) \frac{\partial u}{\partial p} + 1}{\rho \xi} & \frac{1}{\rho \xi} \left( \frac{\partial u}{\partial p} \right) & \frac{\rho(U - u)^2 \frac{\partial u}{\partial p}}{\xi} & -\frac{1}{\rho \xi} \\ -1 & 0 & 0 & 1 \end{vmatrix},$$

$$(23e) \quad B_{12} = \begin{vmatrix} 0 & -\gamma p \rho & 0 & 0 & 0 \\ -\frac{\gamma p}{\xi} & \frac{\gamma p \rho \left[ \rho(U - u)^2 + \gamma p + 2\gamma p \rho (U - u) \frac{\partial u}{\partial p} \right]}{\xi} & 0 & 0 & 0 \\ \frac{1}{\rho \xi} & -\frac{\left[ \rho(U - u)^2 + \gamma p + 2\gamma p \rho (U - u) \frac{\partial u}{\partial p} \right]}{\xi} & 0 & 0 & 0 \\ 0 & \gamma p \rho & 0 & 0 & 0 \end{vmatrix},$$

$$(23f) \quad B_{21} = \begin{array}{cccc} -\frac{\left[2\rho(U-u)\frac{\partial u}{\partial p} + 1\right]}{\rho\xi} & -\frac{1}{\rho\xi}\frac{\partial u}{\partial p} & \gamma p \frac{\frac{\partial u}{\partial p} + 2(U-u)}{\xi} & \frac{1}{\rho\xi} \\ 0 & 0 & 0 & 0 \\ \frac{\left[3\rho(U-u)^2 - \gamma p\right]}{\rho^2(U-u)^2\xi} \frac{\partial S}{\partial p} & \frac{2}{\rho^2(U-u)\xi} \frac{\partial S}{\partial p} & \frac{2(U-u)}{\xi} \frac{\partial S}{\partial p} & \frac{\left[\rho(U-u)^2 + \gamma p\right]}{\rho^2(U-u)^2\xi} \frac{\partial S}{\partial p} \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{array},$$

$$(23g) \quad B_{22} = \begin{array}{cccccc} -\frac{1}{\rho\xi} \frac{\left[\rho(U-u)^2 + \gamma p + 2\gamma p\rho(U-u)\frac{\partial u}{\partial p}\right]}{\xi} & & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 \\ -\frac{\left[\rho(U-u)^2 + \gamma p\right]}{\rho^2(U-u)^2\xi} \frac{\partial S}{\partial p} & \frac{\left[\rho(U-u)^2 - \gamma p\right]^2}{\rho(U-u)^2\xi} \frac{\partial S}{\partial p} & \frac{1}{\rho^2(U-u)^2} & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 1 \end{array},$$

Solving Equation (18a) for  $b(t)$ , there is obtained

$$(24) \quad b(t) = \frac{\rho x u_m - u}{2x^3} .$$

Differentiating this expression with respect to  $t$  along the reflected shock line, there follows

$$(25) \quad Db = \left( \frac{\rho x u_m - u}{2x^3} \right)_t + \rho(U - u) \left( \frac{\rho x u_m - u}{2x^3} \right)_m \equiv F_5 ,$$

Equations (2a), (11), (13), (25), together with the implicit derivative

$$(26) \quad Dp = p_t + \rho(U - u) p_m ,$$

give the system of ordinary differential equations

$$(27) \quad \begin{vmatrix} D & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & D & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & D & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & D & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 \end{vmatrix} \begin{vmatrix} p \\ b \\ x \\ m \\ u \\ S \\ \rho \end{vmatrix} = \begin{vmatrix} p_t + \rho(U - u) p_m \\ F_5 \\ U(p; u_o, p_o, S_o) \\ \rho(U - u) \\ u(p; u_o, p_o, S_o) \\ S(p; u_o, p_o, S_o) \\ \rho(p, S) \end{vmatrix} .$$

Using (19) and (22), we can solve this system.

The solutions of this system give  $b(t)$  as a function of time;  $a(t)$  is then determined by

$$(28) \quad a(t) = \frac{u - b(t)x^3}{x} .$$

The flow behind the reflected shock can now be calculated as solutions of ordinary differential equations, with each point on the calculated shock line serving as an initial point.  $x$  is given by

$$(29) \quad x_t = u = a(t)x + b(t)x^3 ,$$

which integrates along the  $m = \text{constant}$  line into

$$(30) \quad x = x(m) \exp \left\{ \int_{t(m)}^t a(\tau) d\tau \right\} \left[ - \int_{t(m)}^t 2x^2(m)b(\tau) \exp \left\{ \int_{t(m)}^{\tau} 2a(\tau) d\tau \right\} d\tau + 1 \right]^{-1/2} ,$$

where  $x(m), t(m)$  is a point on the shock line. This value of  $x$  substituted into Equation (29) gives  $u$  as a function of  $m, t$ . The pressure is then obtained from Equation (7):

$$(31) \quad p_t = -\gamma p \rho u_m = -\gamma p [a(t) + 3b(t)x^2] ,$$

which integrates into

$$(32) \quad p = p(m) \exp \left\{ - \int_{t(m)}^t \gamma [a(\tau) + 3b(\tau)x^2] d\tau \right\} .$$

On this  $m = \text{constant}$  line, the entropy  $S = S(m)$  is constant and is given on the shock line. The density then follows from Equation (2).

On the wall the pressure simplifies to

$$(33) \quad p(0,t) = p(0) \exp \left\{ - \int_{t(0)}^t \gamma a(\tau) d\tau \right\} .$$

The positive impulse imparted to the wall we take to be

$$(34) \quad \text{Pos. impulse} = \int_{t(0)}^{\bar{t}} \gamma \left[ p(0) \exp \left\{ - \int_{t(0)}^t a(t) dt \right\} - 1 \right] dt ,$$

where  $\bar{t}$  is the time at which  $p(0,t) = 1$ .

RALPH E. SHEAR

RAY C. MAKINO

#### REFERENCES

1. Makino, R. C. Ballistic Research Laboratories Memorandum Report No. 1034, February 1956.
2. Makino, R. C. and Shear, R. E. Ballistic Research Laboratories Technical Note No. 1010, May 1955.
3. Chang, T. S. and Laporte, O. Phys. Fluids 7, 1225, 1964.
4. Ryzhov, O. S. and Khristianovich, S. A. J. of Appl. Math. and Mech. (PMM), 22, 826, 1958.
5. Shindiapin, G. P. J. of Appl. Math. and Mech. (PMM), 29, 121, 1966.
6. Taylor, G. I. Proc. Roy. Soc. (London) A201, 159, 1950. Also MHS Report RC-210, England, 1941.
7. Sedov, L. I. Prikl. Math. Mekh. 10, 241, 1946.
8. Courant, R. and Friedrichs, K. O. Supersonic Flow and Shock Waves (Interscience Publishers, N.Y., 1948), p. 14.
9. See page 123 of Reference 8.



# DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
20	Commander Defense Documentation Center ATTN: TIPCR Cameron Station Alexandria, Virginia 22314	1	Commanding General U.S. Army Combat Developments Command ATTN: COR for CORG Fort Belvoir, Virginia 22060
1	Director of Defense Research and Engineering (OSD) ATTN: Asst Dir/Tac Msl & Ord Washington, D.C. 20301	1	Director U.S. Army Research Office ATTN: CRDPES 3045 Columbia Pike Arlington, Virginia 22204
1	Director Weapons Systems Evaluation Group Washington, D.C. 20305	1	Chief of Naval Operations ATTN: Op-03EG Department of the Navy Washington, D.C. 20350
1	Headquarters Defense Atomic Support Agency ATTN: STBS, Mr. J. Kelso Washington, D.C. 20301	3	Commander U.S. Naval Air Systems Command Headquarters ATTN: AIR-604 Washington, D.C. 20360
1	Commanding General U.S. Army Materiel Command ATTN: AMCRD-TE Washington, D.C. 20315	1	Commanding Officer U.S. Naval Air Development Center, Johnsville Warminster, Pennsylvania 18974
1	Commanding Officer U.S. Army Engineer Research & Development Laboratories ATTN: STINFO Div Fort Belvoir, Virginia 22060	3	Commander U.S. Naval Ordnance Laboratory ATTN: Explo Rsch Dept Mr. P. Hanlon Mr. W. Filler Dr. L. Rudlin Silver Spring, Maryland 20910
1	Commanding Officer U.S. Army Frankford Arsenal ATTN: Lib Br, 0270 Philadelphia, Pennsylvania 19137	1	Commanding Officer U.S. Naval Ordnance Laboratory ATTN: Lib Corona, California 91720
2	Commanding Officer U.S. Army Picatinny Arsenal ATTN: SMUPA-V SMUPA-DK Dover, New Jersey 07801		

# DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
3	Commander U.S. Naval Ordnance Test Station ATTN: Code 753 (2 cys) Code 4541 China Lake, California 93557	1	FTD (TD) Wright-Patterson AFB Ohio 45433
2	Commander U.S. Naval Weapons Laboratory Dahlgren, Virginia 22448	1	Director Environmental Science Services Administration ATTN: Code R, Dr. J. Rinehart U.S. Department of Commerce Boulder, Colorado 80302
3	HQ USAF (AFXPB; AFGOA; AFRDQ) Washington, D.C. 20330	3	Director Lawrence Radiation Laboratory University of California ATTN: Mr. B. Crowley Dr. G. Dorough Dr. S. Fernbach P.O. Box 808 Livermore, California 94551
2	AFSC (SCTN) Andrews AFB Washington, D.C. 20331	4	Director Los Alamos Scientific Laboratory University of California P.O. Box 1663 Los Alamos, New Mexico 87544
1	AEDC (AEOI) Arnold AFS Tennessee 37389	1	Director NASA Scientific and Technical Information Facility ATTN: SAK/DL P.O. Box 33 College Park, Maryland 20740
1	APGC (PGOW) Eglin AFB Florida 32542	1	Director National Aeronautics and Space Administration Langley Research Center ATTN: Mr. Pierce Langley Station Hampton, Virginia 23365
2	AFCRD (CRRDM) L. G. Hanscom Fld Bedford, Massachusetts 01731		
2	AUL (3T-AUL-60-118) Maxwell AFB Alabama 36112		
1	BSD Norton AFB California 92309		
2	AFML (MAY) Wright-Patterson AFB Ohio 45433		

# DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
2	President Research Analysis Corporation ATTN: Lib McLean, Virginia 22101	2	Massachusetts Institute of Technology 77 Massachusetts Avenue Cambridge, Massachusetts 02139
1	Director Applied Physics Laboratory The Johns Hopkins University 8621 Georgia Avenue Silver Spring, Maryland 20910	2	The Pennsylvania State University Department of Engineering Mechanics ATTN: Professor N. Davids Professor P. S. Theocaris University Park, Pennsylvania 16802
1	The Rand Corporation 1700 Main Street Santa Monica, California 90401	1	Purdue University Statistical Laboratory ATTN: Lib Lafayette, Indiana 47907
1	Sandia Corporation P.O. Box 5800 Albuquerque, New Mexico 87115	1	Stanford Research Institute 333 Ravenswood Avenue Menlo Park, California 94025
1	California Institute of Technology Aeronautics Department ATTN: Professor H. Leipmann Pasadena, California 91102	2	Stevens Institute of Technology Davidson Laboratory ATTN: Lib Castle Point Station Hoboken, New Jersey 07030
1	Cornell Aeronautical Laboratory Inc. ATTN: Library P.O. Box 235 Buffalo, New York 14221	1	University of Michigan Department of Engineering ATTN: Lib Ann Arbor, Michigan 48104
1	IIT Research Institute ATTN: Lib 10 West 35th Street Chicago, Illinois 60616	1	University of Utah Institute of Rate Processes ATTN: Lib Salt Lake City, Utah 84112
1	The Johns Hopkins University Institute for Cooperative Research Ballistic Analysis Laboratory 3506 Greenway Baltimore, Maryland 21218	1	Professor K. O. Friedrichs Applied Mathematics Panel New York University New York, New York 10053

# DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
1	Professor M. Holt Graduate Division of Applied Mathematics Brown University Providence, Rhode Island 02912	1	Dr. P. Richards Technical Operations Research South Avenue Burlington, Massachusetts 01801
1	Professor G. B. Whitham Institute of Mathematical Sciences New York University 25 Waverly Place New York, New York 10003	1	Mr. R. T. Bodurtha E. I. DuPont de Nemours and Company, Inc. 10th & Market Streets Wilmington, Delaware 19898
1	Dr. W. Bleakney Palmer Physical Laboratory Princeton University Princeton, New Jersey 08540	1	Mr. R. McAlevy Forrestal Research Center Department of Aeronautical Engineering Princeton University Princeton, New Jersey 08540
1	Dr. S. R. Brinkley Combustion and Explosives Research, Inc. 1007 Oliver Building Pittsburgh, Pennsylvania 15222		<u>Aberdeen Proving Ground</u> Ch, Tech Lib Air Force Ln Ofc Marine Corps Ln Ofc Navy Ln Ofc CDC Ln Ofc

Unclassified

Security Classification

**DOCUMENT CONTROL DATA - R & D**

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

<b>1. ORIGINATING ACTIVITY (Corporate author)</b> U.S. Army Ballistic Research Laboratories Aberdeen Proving Ground, Maryland		<b>2a. REPORT SECURITY CLASSIFICATION</b> Unclassified	
		<b>2b. GROUP</b>	
<b>3. REPORT TITLE</b>  A NON-LINEAR SHOCK WAVE REFLECTION THEORY			
<b>4. DESCRIPTIVE NOTES (Type of report and inclusive dates)</b>			
<b>5. AUTHOR(S) (First name, middle initial, last name)</b>  Shear, R. E. and Makino, Ray C.			
<b>6. REPORT DATE</b> January 1967		<b>7a. TOTAL NO OF PAGES</b> 30	<b>7b. NO OF REFS</b> 8
<b>8a. CONTRACT OR GRANT NO.</b>		<b>9a. ORIGINATOR'S REPORT NUMBER(S)</b> Report No. 1351	
<b>b. PROJECT NO.</b> RDT&E 1P014501A14B			
<b>c.</b>		<b>9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)</b>	
<b>d.</b>			
<b>10. DISTRIBUTION STATEMENT</b>  Distribution of this document is unlimited.			
<b>11. SUPPLEMENTARY NOTES</b>		<b>12. SPONSORING MILITARY ACTIVITY</b> U.S. Army Materiel Command Washington, D.C.	
<b>13. ABSTRACT</b>  A one-dimensional theory of normal reflection of blast waves from walls is given. The method satisfies the initial and boundary conditions of the problem. It is shown how the entire reflected wave zone, including the reflected shock front and the pressure and impulse on the wall, can be calculated.			

**DD FORM 1473**

REPLACES DD FORM 1473, 1 JAN 64, WHICH IS OBSOLETE FOR ARMY USE.

Unclassified

Security Classification

14	KEY WORDS	LINK A		LINK B		LINK C	
		ROLE	WT	ROLE	WT	ROLE	WT
	Shock Reflection Shock Interaction Blast Wave Reflection Pressure And Impulse On Wall Blast Load On Structures Fluid Flow Partial Differential Equations Air Flow Impulse On Wall						